

AFCTN Test Report 94-044

AFCTB-ID 93-077



Technical Publication Transfer

Using:

Northrop Corporation's Data



MIL-D-28000A (IGES)

MIL-M-28001A (SGML)

MIL-R-28002A (Raster)

MIL-D-28003 (CGM)



Quick Short Test Report

04 August 1993



Prepared for

Electronic Systems Center Det 2 HQ ESC/AV-2


Dayton, OH 45431-1672

4027 Colonel Glenn Hwy, Suite 300

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

DISCLAIMER NOTICE



THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

Technical Publication Transfer
Using:
Northrop Corporation's Data

MIL-D-28000A (IGES)
MIL-M-28001A (SGML)
MIL-R-28002A (Raster)
MIL-D-28003 (CGM)

Quick Short Test Report 04 August 1993

Prepared By

Air Force Air Force CALS Test Bed Wright-Patterson AFB, OH 45433

AFCTB Contact

Gary Lammers (513) 427-2295

AFCTN Contact

Mel Lammers (513) 427-2295

DISCLAIMER

This document was prepared as an account of the work sponsored by the Air Force. Neither the United States Government, the Air Force, nor any of their employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, nor represents that its use would not infringe on privately owned rights. Reference herein to any specific commercial products, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the Air Force. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the Air Force, and shall not be used for advertising or product endorsement purposes.

Available to the public from the National Technical Information Service U.S. Department of Commerce 5285 Port Royal Raod Springfield, VA 22161

This report and those involved in its preparation do not endorse any product, process, or company stated herein. Use of these means by anyone does not imply certification by the Air Force CALS Test Network (AFCTN).

Service Management of the service of

Contents

1.	Intro	duction1
	1.1.	Background1
	1.2.	Purpose2
2.	Test I	Parameters3
3.	1840A	Analysis6
	3.1.	External Packaging6
	3.2.	Transmission Envelope6
		3.2.1. Tape Formats6
		3.2.2. Declaration and Header Fields7
4.	IGES A	Analysis7
5.	SGML A	Analysis8
6.	Raste	r Analysis9
7.	CGM A	nalysis10
8.	Conclu	usions and Recommendations12
9.	Append	dix A - Tapetool Report Logs13
	9.1.	Tape Catalog13
	9.2.	Tape Evaluation Log14
	9.3.	Tape File Set Validation Log16
10.	Append	dix B - IGES Detail Analysis18
	10.1.	File D002Q00418
		10.1.1. Parser/Verifier Log18
		10.1.2. Parser Log - AutoCAD R1223
		10.1.3. Output IGESView27

11.	Appendix C - Raster Detail Analysis28
	11.1. File D002R00328
	11.1.1. Output IGESView28
12.	Appendix D - CGM Detail Analysis29
	12.1. File D002C00229
	12.1.1. Parser Log MetaCHECK29
	12.1.2. validcgm Log31
	12.1.3. Output Harvard Graphics32
	12.1.4. Output CADLeaf33

1. Introduction

1.1 Background

The Department of Defense (DoD) Air Force Continuous Acquisition and Life-cycle Support (CALS) Test Network (AFCTN) is conducting tests of the military standard for the Automated Interchange of Technical Information, MIL-STD-1840A, and its companion suite of military specifications. The AFCTN is a DoD sponsored confederation of voluntary participants from industry and government managed by the Electronic Systems Center (ESC).

The primary objective of the AFCTN is to evaluate the effectiveness of the CALS standards for technical data interchange and to demonstrate the technical capabilities and operational suitability of those standards. Two general categories of tests are performed to evaluate the standards; formal and informal.

Formal test are large and comprehensive, which follow a written test plan, require specific authorization from the DoD, and may take months to prepare, execute, and report.

Informal tests are quick and short, used by the AFCTN technical staff, to broaden the testing base. They include representative samples of the many systems and applications used by AFCTN participants. They also allow the AFCTN staff to gain feedback from many industry and government interpretations of the standards, to increase the base of participation in the CALS initiative, and respond to the many requests for help that come from participants. Participants take part voluntarily, benefit by receiving an evaluation of their latest implementation (interpretation) of the standards, interact with the AFCTN technical staff, gain experience using the standards, and develop increased confidence in them. The results of informal tests are confidence in them. The results of informal tests are reported in Quick Short Test Reports (QSTRs) that briefly summarize the standard(s) tested, the hardware and software used, the nature of the test, and the results.

1.2 Purpose

The purpose of the informal test, reported in this QSTR, was to analyze Northrop Corporation's interpretation and use of the CALS standards in transferring technical publication data. Northrop used its CALS Technical Data Interchange System to produce data, in accordance with the standards, and delivered it to the AFCTN technical staff on a 9-track magnetic tape.

2. Test Parameters

Test Plan:

AFCTB 93-077

Date of

Evaluation:

04 August 1993

Evaluator:

George Elwood

Air Force CALS Test Bed

Det 2 HQ ESC/AV-2 4027 Colonel Glenn Hwy

Suite 300

Dayton OH 45431-1672

Data

Originator:

John P. Kent

Northrop Corporation

B-2 Division

L591/UB

8900 East Washington Blvd Pico Rivera CA 90660

(310) 948-0624

Data

Description:

Technical Manual Test

2 Document Declaration files

2 Document Type Definitions (DTD)

1 Initial Graphics Exchange Specification

(IGES) file

2 Text/Standard Generalized Markup Language

(SGML) files

1 Raster file

1 Computer Graphics Metafile (CGM) file

Data

Source System:

1840

HARDWARE

Unknown

SOFTWARE

Unknown

IGES

HARDWARE

Unknown

SOFTWARE

Unknown

Text/SGML

HARDWARE

Unknown

SOFTWARE

Unknown

Raster

HARDWARE

Unknown

SOFTWARE

Unknown

CGM

HARDWARE

Unknown

SOFTWARE

Unknown

Evaluation Tools Used:

MIL-STD-1840A (TAPE)

SUN 3/280

AFCTN Tapetool v1.2.9 UNIX
XSoft CAPS/CALS v40.4

MIL-D-28000 (IGES)

Sun SparcStation 2

ArborText iges2draw

Carberry CADLeaf Plus v3.1

IGES Data Analysis (IDA) Parser/Verifier v92

IDA IGESView v3.05

Rosetta Technologies Prepare

Rosetta Technologies Preview v3.2

PC 486/50

AUTODESK AutoCAD 386 R12 Cadkey Cadkey v5.02 IDA IGESView Windows

MIL-M-28001 (SGML)

SUN SparcStation 2

ArborText ADEPT v4.2.1

PC 486/50

Datalogics ParserStation v3.36 Exoterica XGMLNormalizer v1.2e3.2 Exoterica Validator v2.0 ex1 McAfee & McAdam Sema Mark-it v2.3

MIL-R-28002 (Raster)

SUN SparcStation 2

ArborText g42tiff
Carberry CADLeaf Plus v3.1
AFCTN validg4
AFCTN calstb.475
AFCTN xrastb.sun4
IDA IGESView v3.0

Island Graphics IslandPaint v3.0

PC 486/50

IDA IGESView Windows Inset Systems HiJaak Pro

MIL-D-28003 (CGM)

SUN SparcStation 2

ArborText cgm2draw
Island Graphics IslandDraw v3.0
Carberry CADLeaf Plus v3.1

PC 486/50

Advance Technology Center
(ATC) MetaCheck R 2.10
Software Publishing Corporation
(SPC) Harvard Graphics v3.05

Inset Systems HiJaak Pro Lotus Freelance v2.01 Micrografx Designer v3.1 Corel Ventura Publisher

Standards Tested:

MIL-STD-1840A MIL-D-28000A MIL-M-28001A MIL-R-28002A MIL-D-28003

3. 1840A Analysis

3.1 External Packaging

The tape arrived at the Air Force CALS Test Bed (AFCTB) enclosed in a box in accordance with ASTM D 3951. The exterior of the box was marked with a magnetic tape warning label, as required by MIL-STD-1840A, para. 5.3.1.3.

The tape was enclosed in a barrier bag as required by MIL-STD-1840A, para. 5.3.1.2. Inspection of the tape reel showed the label indicating the recording density, as required by MIL-STD-1840A, para. 5.3.1. Enclosed in the box was a packing list showing all files recorded on the tape.

3.2 Transmission Envelope

The 9-track tape received by the AFCTB contained MIL-STD-1840A files. The files were named per the standard conventions.

3.2.1 Tape Formats

The tape was run through the AFCTN $Tapetool\ v1.2.10$ utility. No errors were encountered while evaluating the contents of the tape labels.

A note was reported on the tape label version. MIL-STD-1840A permits the use of both version three and four. The use of the most current standard should be used and noted.

The tape was read using the XSoft CAPS read1840A utility, without any reported errors.

The physical structure of the tape meets MIL-STD-1840A requirements.

3.2.2 Declaration and Header Fields

No errors were found in the Document Declaration files or data file headers. This portion of the tape meets the CALS MIL-STD-1840A requirements.

4. IGES Analysis

The tape contained one IGES file. This file was evaluated using IDA's parser/verifier, set for CALS Class I. No errors were reported by this utility.

The AFCTB has several tools for viewing IGES files. These tools are not used to generate a pass/fail but to report how commercially available software can handle the files. Many of these products are used in the development of technical publications and are good indicators of usability. The use of these products is not an endorsement nor an indication of CALS capability. All operations were performed using the default settings.

The file was converted using ArborText's iges2draw utility with no reported errors. The resulting file was read into Island Graphics' IslandDraw and displayed. When viewed on the screen only the right part of the image displayed on the left side of the screen. The error was traced to the use of the negative X value for the start point of the file. Using an undocumented capability of the ArborText iges2draw utility a new file was generated. This file produced a complete image.

The file was read using AUTODESK's AutoCAD R12 with translator version 5.1. No errors were noted and the image appear to be complete.

The file was converted using Cadkey's ig2c utility. The resulting files were read into Cadkey's Cadkey and displayed. The image appeared to be complete.

The file was read into Carberry's *CADLeaf* software without a reported error. When viewed on the screen only the right part of the image displayed on the left side of the screen. This is the same problem encountered in the ArborText utility.

The file was read using IDA's *IGESView* and *IGESView* for *Windows*. The image display and printed without a problem.

The IGES file was converted using Rosetta Technologies' *Prepare* without a reported error. The resulting file was read into Rosetta Technologies' *Preview* and displayed.

The IGES file meets the CALS MIL-D-28000A specification.

5. SGML Analysis

The tape contained two DTDs and two Text files. The AFCTB has several parsers available for evaluating submitted DTD and Text files. These tools are not used to generate a pass/fail but to report how commercially available software can handle the files. These products are used in the development of technical publications and are good indicators of usability. The use of these products is not an endorsement nor an indication of CALS capability. All operations were performed using the default settings unless specified in the report. Changes to DTD or Text files required by each system are not documented in the report.

Both Text and DTD files were evaluated using Datalogics' ParseStation. No errors were reported in either file.

Both Text and DTD files were evaluated using Exoterica's Validator exl parser with no reported errors in either file.

Both Text and DTD files were tested using Exoterica's XGML-Normalizer parser without a reported error.

Both Text and DTD files were evaluated using McAfee & McAdam' Sema Mark-it parser without a reported error.

Both Text and DTD files were evaluated using the Public Domain sgmls parser without a reported error.

Many attempts to imported into ArborText's Adept software were tried. The DTD would not parse indicating warnings with the elements "entry", "notice", and "result". The included Format Output Specification Instance (FOSI) would not import into this product.

The SGML files meet the CALS MIL-M-28001A specification.

6. Raster Analysis

The tape contained one Raster file. This file was evaluated using the AFCTN *validg4* utility. This program reported the file meets the CALS MIL-R-28002A specification.

The file was read into the AFCTN calstb.475 viewing utility. No problems were noted. However, the image scanned at a slight angle.

The file was read into the AFCTN xrastb viewing utility without a reported error.

The AFCTB has several tools for viewing Raster filed. These tools are not used to generate a pass/fail but to report how commercially available software can handle the files. Many of these products are used in the development of technical publications and are good indicators of usability. The use of these products is not an endorsement nor an indication of CALS capability. All operations were performed using the default settings.

The file was converted using ArborText's g42tiff utility without a reported error. The resulting file was read into Island Graphics' IslandPaint and displayed.

The Raster file was read into Carberry's CADLeaf software without a reported error and displayed.

The file was read into IDA's *IGESView* and *IGESView for Windows* without a reported error.

The file was read into Inset Systems' HiJaak Pro without a reported error.

The Raster file was converted using Rosetta Technologies' *Prepare* without a reported error. The resulting file was read into Rosetta Technologies' *Preview* and displayed.

The Raster file meets the CALS MIL-R-28002A specification.

7. CGM Analysis

The tape contained one CGM file. The file was evaluated using ATC's *MetaCheck* with CALS options. This utility reported the file meets the CALS MIL-D-28003 specification.

The CGM file was evaluated using the beta AFCTN validcgm utility with one reported error.

The AFCTB has several tools for viewing CGM files. These tools are not used to generate a pass/fail but to report how commercially available software can handle the files. Many of these products are used in the development of technical publications and are good indicators of usability. The use of these products is not an endorsement nor and indication of CALS capability. All operations were performed using the default settings.

The CGM file was converted using ArborText's cgm2draw utility without a reported error. The resulting file was read into Island Graphics' IslandDraw and displayed. Text overflow was noted in the block descriptions along the bottom of the blocks.

The file was viewed using ATC's MetaView software. Errors were noted in the fonts.

The file was read into Carberry's *CADLeaf* software, displayed and printed. Text overflow was noted in the block descriptions.

The file was read into Inset Systems' HiJaak for Windows with a reported error, indicating real precision was not supported. Nothing displayed.

The file was imported directly into Island Graphics' *IslandDraw* without a reported error. No text overflow was noted, but the two elliptical arcs were in error. The restricted text block also displayed in error.

An attempt was made to import the file into Lotus' Free-lance. A Windows general protection error was reported.

The file was imported into the Micrografx Designer without a reported error; however, nothing displayed.

The file was imported into SPC's Harvard Graphics 3.05 with four reported errors: Line style, adjustment of points,

non-CGM entities encountered, and non-translated entities. The displayed and printed image did not reflect the actual file.

An attempt to import the file into Corel's *Ventura Publisher* generated an error indicating the file was not the proper format.

The CGM file meets the CALS MIL-D-28003 specification.

8. Conclusions and Recommendations

The tape from Northrop Corporation had no reported errors in either the physical structure or CALS headers. The tape construction meets the CALS MIL-STD-1840A requirements.

The IGES file meets the CALS MIL-D-28000A specification.

The SGML files meet the CALS MIL-M-28001A specification.

The Raster file meets the CALS MIL-R-28002A specification.

The CGM file meets the CALS MILD-28003 specification.

The tape submitted by Northrop Corporation meets the CALS MIL-STD-1840A requirements.

9. Appendix A - Tapetool Report Logs

9.1 Tape Catalog

Air Force CALS Test Network Catalog Evaluation - Version 1.2; Release 10 (C)

Standards referenced:

MIL-STD-1840A (1987) - Automated Interchange of Technical Information ANSI X3.27 (1987) - File Structure and Labeling of Magnetic Tapes for Information Interchange

ANSI X3.4 (1986) - Coded Character Sets - 7 Bit ASCII

Tue Aug 3 15:10:07 1993

MIL-STD-1840A File Catalog

File Set Directory: /cals/u1210/Set006

Page: 1

File Type	Record Format/ Length	Block Length/Total	Selected/ Extracted
Document Declaration	D/00260	02048/000001	Extracted
Document Declaration	D/00260	02048/000001	Extracted
Text	D/00260	02048/000001	Extracted
DTD	D/00260	02048/000003	Extracted
Output Specification	D/00260	02048/000016	Extracted
Text	D/00260	02048/000002	Extracted
CGM	F/00080	00800/000006	Extracted
Raster	F/00128	02048/000017	Extracted
IGES	F/00080	02000/000012	Extracted
DTD	D/00260	02048/000010	Extracted
Output Specification	D/00260	02048/000061	Extracted
	Document Declaration Document Declaration Text DTD Output Specification Text CGM Raster IGES DTD	Format/ File Type Length Document Declaration D/00260 Document Declaration D/00260 Text D/00260 Output Specification D/00260 Text D/00260 CGM F/00080 Raster F/00128 IGES F/00080 DTD D/00260	Format/ Block File Type Length Length/Total Document Declaration D/00260 02048/000001 Document Declaration D/00260 02048/000001 Text D/00260 02048/000001 DTD D/00260 02048/000003 Output Specification D/00260 02048/000016 Text D/00260 02048/000016 Text D/00260 02048/000002 CGM F/00080 00800/000006 Raster F/00128 02048/000017 IGES F/00080 02000/000012 DTD D/00260 02048/000010

Catalog Process terminated normally.

9.2 Tape Evaluation Log

```
Air Force CALS Test Network Tape Evaluation - Version 1.2; Release 10 (C) Standards referenced:

ANSI X3.27 (1987) - File Structure and Labeling of Magnetic Tapes
```

ANSI X3.27 (1987) - File Structure and Labeling of Magnetic Tapes for Information Interchange

ANSI X3.4 (1986) - Coded Character Sets - 7 Bit ASCII

Tue Aug 3 15:09:51 1993

ANSI Tape Import Log

Allocating tape drive /dev/rmt0...

/dev/rmt0 allocated.

VOL1ITDS01 CONTROLLER

Label Identifier: VOL1
Volume Identifier: ITDS01
Volume Accessibility:
Owner Identifier:

Label Standard Version: 4

HDR1D001 ITDS0100010001000 93210 93210 000000 CONTROLLER

Label Identifier: HDR1 File Identifier: D001

File Set Identifier: ITDS01 File Section Number: 0001 File Sequence Number: 0001 Generation Number: 0001

Generation Version Number: 00

Creation Date: 93210 Expiration Date: 93210 File Accessibility: Block Count: 000000

Implementation Identifier: CONTROLLER

HDR2D0204800260 00

Label Identifier: HDR2 Recording Format: D Block Length: 02048 Record Length: 00260 Offset Length: 00

******* Tape Mark *********

Actual Block Size Found = 2048 Bytes. Number of data blocks read = 1. ******** Tape Mark ********* EOF1D001 ITDS0100010001000100 93210 93210 000001 CONTROLLER Label Identifier: EOF1 File Identifier: D001 File Set Identifier: ITDS01 File Section Number: 0001 File Sequence Number: 0001 Generation Number: 0001 Generation Version Number: 00 Creation Date: 93210 Expiration Date: 93210 File Accessibility: Block Count: 000001 Implementation Identifier: CONTROLLER EOF2D0204800260 00 Label Identifier: EOF2 Recording Format: D Block Length: 02048 Record Length: 00260 Offset Length: 00 ******* Tape Mark ********* <><< PART OF LOG FILE REMOVED HERE >>>> ****** Tape Mark ********* ########## End of Volume ITDS01 ##############

Tape Import Process terminated normally.

Deallocating /dev/rmt0...

########### End Of Tape File Set ###############

9.3 Tape File Set Validation Log

Air Force CALS Test Network File Set Evaluation - Version 1.2; Release 10 (C)

Standards referenced:

MIL-STD-1840A (1987) - Automated Interchange of Technical Information

Tue Aug 3 15:10:07 1993

MIL-STD-1840A File Set Evaluation Log

File Set: Set006

Found file: D001

Extracting Document Declaration Header Records...
Evaluating Document Declaration Header Records...

srcsys: John P. Kent, ITDS Chief Engineer, Northrop Corporation, B-2 Division, L591/UB, 8900 E. Washington Blvd., Pico Rivera, CA 90660-3765 (310) 948-0624

srcdocid: STPRO25.2.4

srcrelid: NONE
chglvl: ORIGINAL
dteisu: 19930729

dstrelid: NONE dtetrn: 19930729

dstsys: Jeff Fisher, Integration Manager, USAF Air Force CALS Test Bed, HQ AFMC

(I)/ENCT, TechneCenter, 4027 Col. Glenn Highway, Dayton, OH 45431-1601

dstdocid: STPRO25.2.4

dlvacc: NONE
filcnt: T1, H1, G1
ttlcls: UNCLASSIFIED
doccls: UNCLASSIFIED
doctyp: TEST DOCUMENT

docttl: Test Document STPRO25.2.4

<><< PART OF LOG FILE REMOVED HERE >>>>

Evaluating numbering scheme...

No errors were encountered during numbering scheme evaluation. Numbering scheme evaluation complete.

Checking file count...

No errors were encountered during file count verification. File Count verification complete.

No errors were encountered in Document D001.

Found file: D002

Extracting Document Declaration Header Records... Evaluating Document Declaration Header Records...

srcsys: John P. Kent, ITDS Chief Engineer, Northrop Corporation, B-2 Division, L591/UB, 8900 E. Washington Blvd., Pico Rivera, CA 90660-3765 (310) 948-0624

srcdocid: STPRO25.2.5

srcrelid: NONE
chglvl: ORIGINAL
dteisu: 19930729

dstsys: Jeff Fisher, Integration Manager, USAF Air Force CALS Test Bed, HQ AFMC

(I)/ENCT, TechneCenter, 4027 Col. Glenn Highway, Dayton, OH 45431-1601

dstdocid: STPRO25.2.5

dstrelid: NONE dtetrn: 19930729 dlvacc: NONE

filcnt: T1, H1, G1, C1, Q1, R1

ttlcls: UNCLASSIFIED doccls: UNCLASSIFIED doctyp: TEST DOCUMENT

docttl: Test Document STPRO25.2.5

<<<<< PART OF LOG FILE REMOVED HERE >>>>

Evaluating numbering scheme...

No errors were encountered during numbering scheme evaluation. Numbering scheme evaluation complete.

Checking file count...

No errors were encountered during file count verification. File Count verification complete.

No errors were encountered in Document D002.

No errors were encountered in this File Set.

MIL-STD-1840A File Set Evaluation Complete.

10. Appendix B - Detailed IGES Analysis

10.1 File D002Q004

10.1.1 Parser/Verifier Log

```
********
***** IGES PARSER/VERIFIER
      MARCH 1993
     IGES Data Analysis
****
                        ****
***** (708) 344-1815
********
Input file is /novell/9377/D002Q004_IGS
Checking conformance to CALS Class I (MIL-D-28000A 2/10/92)
Today is August 3, 1993 4:15 PM
********
      CHECK FILE SYNTAX
********
   Section Records
   Start
                 7
   Global
                 82 ( 41 Entities)
   Directory
   Parameter
               192
   Terminate
NITPICK 2489: Excess precision in real constant (3.57988857) for XS of D
NITPICK 2489: Excess precision in real constant (3.8421068) for YS of D
NITPICK 2489: Messages regarding excess precision suppressed.
 ********
***** SUMMARY AND STATISTICS ****
********
*** File and Product Name Information ***
   File name from sender = 'Q004.iges'
   File creation Date.Time = '930729.142344'
   Model change Date.Time = ''
```

```
Author
                          = 'tom'
                          = 'GRAPHICS'
  Department
  Product name from sender = 'Q004.iges'
  Destination product name = 'Q004.iges'
*** Parameter Delimiters ***
  Delimiter = ','
  Terminator = ';'
*** Originating System Data ***
                        = 'ITDS CONVERTER: GEF_IGES'
  System ID
  Preprocessor version = '1.0'
  Specification version = 6 (IGES 4.0)
*** Precision levels ***
  Integer bits =
  Floating point - Exponent = 38 Mantissa =
                                                     6
  Double precision - Exponent = 308 Mantissa =
                                                    15
*** Global Model Data ***
  Model scale
                       = 1.0000E+00
  Unit flag
                         = 1
  Units
                         = 'IN'
  Line weights
                         = 3
  Maximum line thickness = 1.000000E-02
  Minimum line thickness = 3.33333E-03
                        = 1.000000E-03
  Granularity
  Maximum coordinate
                       = 2.954101E+00
  Drafting standard applicable to original data is not specified.
*** Status Flag Summary ***
Blank status: Visible
                                            41
              Blanked
                                             0
Independence: Independent
                                           39
              Physically Subordinate
                                            0
              Logically Subordinate
                                            2
              Totally Subordinate
                                           39
Entity use:
              Geometry
                                            2
              Annotation
              Definition
                                            Ω
              Other
                                             0
              Logical/Positional
                                            0
```

	2D parametric	0		
	Construction geometry	0		
Not Specified				
Hierarchy:	Structure DE applies	0		
-	Subordinate DE applies	41		
	Hierarchy property applies	0		
	Not Specified	0		
*** Entity Oc	currence Counts ***			

*** Entity Occurrence Counts

Entity	Form	Level	Count	Туре
106	11	0	24	Copious data - Piecewise planar, Jinear
string	g(2D lir	near path)		
106	63	0	8	Simple closed planar curve
110	0	0	6	Line
404	0	0	1	Drawing
406	16	. 0	1	Property - Drawing size
410	0	0	1	View - Orthographic parallel

*** Entity Count by Level ***

Level Count 0 41

*** Labeling Information ***

0% of the entities are labeled.

Unlabeled 41

*** Line Fonts Used in Data ***

100 102 104 106 108 110 112 114

-	_	-	-	-	-	-	-	Undefined
-	-	-	32	-	6	-	-	Solid
-	-	-	-	-	-	-	-	Dashed
_	_	-	-	-	-	-	-	Phantom
-	_	-	-	-	-	-	-	Center-line
-	-	-	_	-	-	-	-	Dotted

<><< PART OF LOG FILE REMOVED HERE >>>>

*** Line Widths Used in Data ***

Weight Count Width

```
Defaulted
              31
                       (0.0033)
      2
                10
                       (0.0067)
 *** Colors Used in Data ***
 Defaulted
                8
       Red
     Green
                30
 ********
 ***** ENTITY ANALYSIS
 **********
 *** Entity type: 106
 *** Entity tyre: 110
        6 lines averaging 1.362447E-01 units --
 *** Entity type: 404
Drawing at D 5 contains 1 views.

Drawing at D 5 contains 0 annotation entities.
WARNING 2492: Undefined line font value (0) specified for D 5.
*** Entity type: 406
WARNING 2492: Undefined line font value (0) specified for D 3.
 *** Entity type: 410
 Scale of view at D 1 is 1.000000E+00.
Orthographic View entity at D 1 has 0 clipping planes specified.
  XMIN = Not Set XMAX = Not Set
                     YMAX = Not Set
  YMIN = Not Set
  ZMIN = Not Set
                    ZMAX = Not Set
WARNING 2492: Undefined line font value (0) specified for D 1.
*** Message Summary ***
2038: 3 Invalid Line font values.
 *** Error Summary ***
    0 fatal errors
    0 severe errors
    0 errors
```

```
3 warnings
```

⁰ cautions

⁸⁴² nitpicks

⁰ notes

^{***} End of Analysis of /novel1/9377/D002Q004_IGS ***

10.1.2 Parser Log - AutoCAD R12

Title: IGESIN Journal (v5.1 Nov 05 1992)

File: B:\Q204.xli

Date: Tue, Aug 03, 1993

Time: 23:20:11

EVALUATION VERSION -- NOT FOR RESALE

Translator S/N: 117-10075750

Translating from IGES file:

B:\Q204.IGS

to AutoCAD Drawing: UNNAMED.dwg

Options obtained from: C:\ACAD\SUPPORT\IGES.OPT

Options Description: Configuration file for NIGESIN & NIGESOUT

Curves Approximated to Tolerance of 0.1 Surfaces Approximated to Tolerance of 0.1

Text Font/Style mapping:

IGES	Text font	Style	Name	ACAD	Font
	0		SYMBOL0		iges0
	1		STANDARD		iges0
	2		STANDARD		iges0
	3		STANDARD		iges0
	6		STANDARD		iges0
	12		GOTHIC		iges0
	13		GOTHIC		iges0
	14		ROMANS		iges0
	17		STANDARD		iges0
	18		STANDARD		iges0
	19		STANDARD		iges0
	1001		SYMBOL1	ige	es1001
	1002		SYMBOL2	ige	es1002
	1003		SYMBOL3	ige	es1003
	2001		KANJI	b:	igfont

Annotation Angular Tolerance = 0.01

IGES Linefont/AutoCAD Linetype mapping

IGES Line Font	AutoCAD linetype	Shape file
0	BYLAYER	acad.lin
1	CONTINUOUS	acad.lin
2	DASHED	acad.lin
3	PHANTOM	acad.lin

acad.lin CENTER 4 acad.lin DOT 5 Named matrices translated to AutoCAD UCS's. 106 forms 1-3 and 31-38 not placed in a block. IGES trace information attached as XED Parse phase Start Section: CONFORMANCE: MIL-D-28000 Amendment1, 20 December 1988 Technical Illustration Class I Subset ILLUSTRATION IDENTIFIER: Q004.iges Global Section: Parameter Delimiter: Record Delimiter: Q004.iges Sending Product ID: Q004.iges File Name: ITDS CONVERTER: GEF_IGES System ID: Preprocessor Version: 1.0 Size of Integer: 32 Sgl. Precision Mag: 38 6 Sgl. Precision Sig: 308 Dbl. Precision Mag: 15 Dbl. Precision Sig: Receiving Product ID: Q004.iges Model Space Scale: 1.000000 Unit Flag: IN Unit String: # of Line Weights: 0.010000 Maximum Line Width: 07/29/93 14:23:44 Creation Date: Minimum Resolution: 0.001000 2.954101 Maximum Coordinate: Author: tom **GRAPHICS** Organization: IGES Version Number: 0 Drafting Standard:

Entity Summary:

Туре	Form	Description	Count
106	11	Planar Piecewise Linear Curve	24
106	63	Simple Closed Planar Curve	8
110	0	Line	6
404	0	Drawing (form 0)	1
406	16	Property (Drawing Size)	1
410	0	View	1
		Total	41
======	=======	~======================================	=

Translation phase

```
Drawing Entity (404 Form 0) at DE 5, with
  name = ,
  size = 3.579889, 3.842107,
  units = IN,
was processed in the AutoCAD drawing file: C:\UNNAMED.dwg

*** Warning (ACAD_NEW_VIEW_VOLUME_GENERATED) ***
( DE: 1 TF: 410:0 )
A new view volume has been generated for the view with:
  XMIN (-3.565349), XMAX (0.844311),
  YMIN (-1.296656), YMAX (3.362281),
  ZMIN (-0.500106), ZMAX (0.500106).
```

IGES Entity Summary


Type	Form	Description	Count	Processed	Errors
=====	=====	=======================================	=====	=======	=====
106	11	Planar Piecewise Linear Curve	24	24	0
106	63	Simple Closed Planar Curve	8	8	0
110	0	Line	6	6	0
404	0	Drawing (form 0)	1	1	0
406	16	Property (Drawing Size)	1	1	0
410	0	View	1	1	0
			=====	=======	=====
Totals			41	41	0

AutoCAD Entity Summary

Entity	Created	Errors
=======	======	======
LINE	6	0
POLYLINE	32	0

```
Totals
      ====== ======
__________
Error Summary:
The following message was issued 1 time(s)
A new view volume has been generated for the view with:
XMIN (%lf), XMAX (%lf),
YMIN (%lf), YMAX (%lf),
ZMIN (%lf), ZMAX (%lf).
Status: 0
Warning: 1
Error: 0
Fatal: 0
Elapsed Time:
Processor: 00:00:16
Clock:
      00:00:17
______
```

10.1.3 Output IGESView

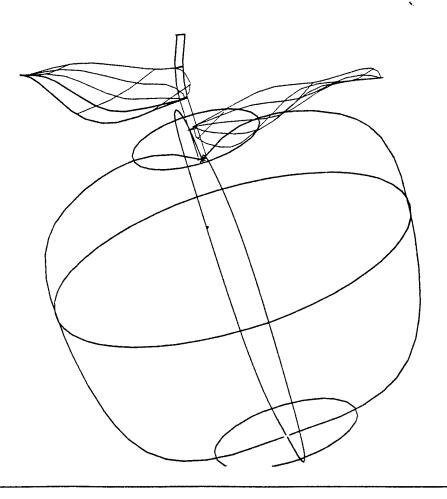

11. Appendix C - Detailed Raster Analysis

11.1 File D002R003

11.1.1 Output IGESView

S. J	URMY MATERIEL CON URMY MISSILE COMM	AAND				-	ART: IST	S ·		106772 C BB/TF	LATION NO.
EDS	TONE ARSENAL, AL	ABAMA								188	76
JLE	OSCILLATOR, VOLTA	GE CONTROLLED-CO	10-A3A13	ULLINCON 63343	DATE	14	NOV	70 _{REV}	SHEET	301	
PAGE .	PART OR	DRAMME OF SPECIFICATION NO.	7	ONDICATURE	OWNTTTY	PL.	MI	FROM	TMITY .	ZORE -	NOTES OF
20 .	10181751-207	10181751	RESISTO	· · · · · · · · · · · · · · · · · · ·	 	-		PROF		+	
	10181751-208	10181751	RESISTO		1	í			1	1	
	10181751-209	10181751	RESISTO		1	1	j		i	1	
	10181751-209	10181751	RESISTO		1	1	ĺ	1	I	1. '	
	10181751-210	10181751	RESISTO		1		l	1 .	l	1 1	
	10101131-511	1 2222.31		•	1	;	•	I		! !	
	10181751-212	10181751	RESISTO	,	1	1	1		1	i l	
	10181751-213	10181751	RESISTO		1	ļ			ŀ	1 .	
	10181751-214	10181751	RESISTO		1	•				1	
	10181751-215	10161751	RESISTO		į	1			:	1 1	
2	10181752-261	10181752	RESISTO		1	1	1	1	:	1	
•				•	1 *	i			1	1 1	
3	10161752-357	10181752	RESISTO	t	1	:	1	1	1	1 :	
- 1	10181751-147	10181751	RESISTO		1 2	ì	•		ı	! .	
5	10180306-239	10180306	RESISTO		1 2			l		1 1	
6	10181751-133	10181751	RESISTO		! ī	1			l	1 !	
7		10181751	RESISTO		' î	1		i	ļ	1 ,	
•	10101151 100			•	1 -		l	1 :	1	í.	
8	10180328-418	10180328	RESISTO		1	1 1	•		i	1 1	
ē	10161752-283	10121752	RESISTO		! 1	!	5			1 1	
10	10181752-298	1 10161752	RESISTO		· ī	1		1	i	1 1	
ii	10181752-306	10181752	RESISTO					1	l	1 1	
12	10181752-297	10181752	RESISTO	į	1 1				!	1 '	
					1 -	1					
13	10181752-289	10181752	RESISTO	₹	1	ì		1 :	:	1 1	
14	10181752-271	10181752	RESISTO	₹ '	1	1		1	1	1 1	
15	10181752-310	10141752	RESISTO		· i i			1	I	1. !	
16	10181751-55	10161751	RESISTO:		ī	1				i i	1
	10181751-1	10181751	RESISTO		1 -	1	:	,	!	1	-
		1	1		i	1	!	1		1: [
	10181751-2	10181751	RESISTO	()	1	1			I	1 1	
	10181751-3	. 10181751	RESISTO		1	1		1	I	11 1	
	10181751-4	10181751	RESISTO		1	1		1 '	ı	1 1	
	10181751-5	10181751	RESISTO			1		1 :	ł	1:	
	10181751-6	10181751	RESISTO		1	!		[:]		.	
			1	•	1	1				: 1	
	! .	1.			1 .	1	1		:	1 . 1	
		1:	1	1	•	1	i			1	•
	l	§ .	1		1			1		1 : 1	

12. Appendix D - Detailed CGM Analysis

12.1 File D002C002

12.1.1 Parser Log MetaCHECK

MetaCheck Version 2.10 -- CGM/MIL-D-28003 Conformance Analyzer Copyright 1988-93 CGM Technology Software Execution Date: 08/04/93 Time: Metafile Examined : b:c202.cgm Pictures Examined : All Elements Examined : All Examined : All Byces ============= Trace Report ================================== Tracing not selected. ======== CGM Conformance Violation Report ========== No Errors Detected ====== CALS CGM Profile (MIL-D-28003) Report ========= No profile discrepancies detected. ======== Conformance Summary Report ============ MetaCheck Version 2.10 -- CGM/MIL-D-28003 Conformance Analyzer Copyright 1988-93 CGM Technology Software Time: 07:39:57 Execution Date: 08/04/93 Name of CGM under test: b:c202.cgm Encoding : Binary Pictures Examined : All Elements Examined : All Examined : All Bytes BEGIN METAFILE string : >C002.cgm< METAFILE DESCRIPTION : >NORTHROP B2 ITDS GEF, MIL-D-28003/BA< >SIC-1<

Picture 1 starts at octet offset 200: >Picture 1<

Conformance Summary : This file conforms to the CGM specification.

This file meets the CALS CGM Profile (MIL-D-28003).

Summary of Testing performed and Errors Found:

1 Pictures Tested 272 Elements Tested 3978 Octets Tested


| No Errors Were Detected |

========= End of Conformance Report =============

12.1.2 validcgm Log

```
Analysis for file c202.cgm using table table
ERROR: illegal in this state (2), std B
ERROR: required precursor (0, 4) not yet seen
                 (3, 6, 2)
                                Clip Indicator OFF
MILSPEC 28003 error: illegal hatch index
               (5, 24, 2)
                               Hatch Index 6
(173, 2352)
(0, 1) occurred 1 time
(0, 2) occurred 1 time
(0, 3) occurred 1 time
(0, 4) occurred 1 time
(0, 5) occurred 1 time
(1, 1) occurred 1 time
(1, 2) occurred 1 time
                   <<<<< PART OF LOG FILE REMOVED HERE >>>>
(3, 6) occurred illegally 1 time
(4, 1) occurred 32 times
(4, 3) occurred 5 times
(4, 4) occurred 50 times
                   <<<<< PART OF LOG FILE REMOVED HERE >>>>
(5, 22) occurred 10 times
(5, 23) occurred 8 times
(5, 24) occurred 7 times
(5, 27) occurred 2 times
(5, 28) occurred 2 times
(5, 29) occurred 2 times
(5, 30) occurred 10 times
(5, 31) occurred 7 times
(5, 34) occurred 1 time
```

12.1.3 Output Harvard Graphics



12.1.4 Output CADLeaf

